


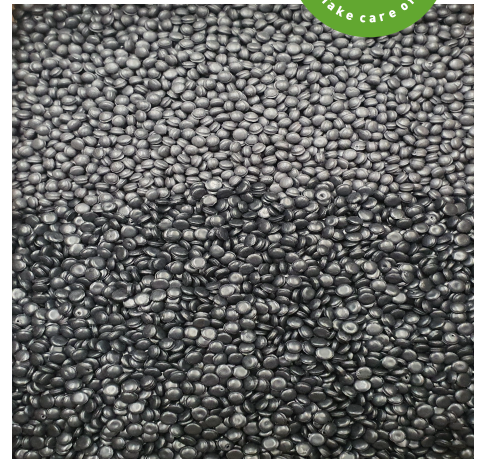

Product: BPM-Propylen - PP Granulat

Color: Black, Anthracite, Colorful

Type: Granulat

Filtration: 150 my

Parameter	Norm	Guideline	Unit
Density	EN ISO 55990	0,97	g/cm ³
Melt flow index	EN ISO 1133	7,0	g/10 min.
E tensile modulus	EN ISO 527	1400	MPa
Charpy Impact strength 23°C	EN ISO 179	90	kJ/m ²
Charpy notched bar impactstrength 23°C	EN ISO 179	4,0	kJ/m ²
Tensile yield strength	EN ISO 527	26	MPa
Elongation at yield	EN ISO 527	>50	%

All informatin on this product data sheet are average values and are based on our current knowledge and experiences. They do not excuse the user of own examinations and experiments. A legally binding undertaking of certain qualities or the suitability for a specific application can not be derived from this data.

Applications :

PP use for body material, moldings, pipes, or garden furniture.



EuCertPlast

Adress:

Best Plastic Management GmbH
Industriestraße 20-24
26219 Bösel
Germany

+49 (0) 44 94 / 15 55
+49 (0) 44 94 / 83 27

info@best-plastic.de
www.best-plastic.de

Documents:

Packaging:

Certification: