


Produkt: BPM PP Polypropylen

Farbe: Black, Grey 7047, Colorful, Anthracite 7015

Type: Granulat

Filtrierung: 150 my

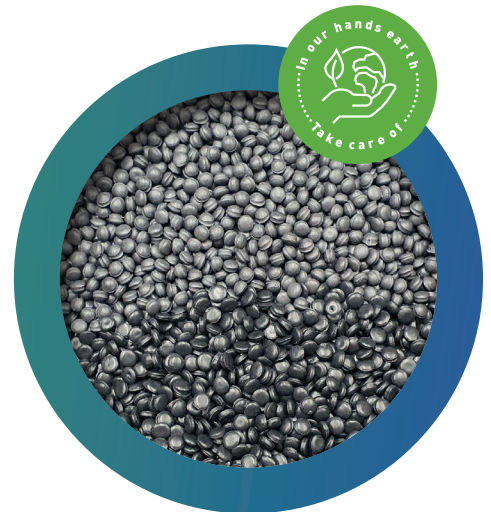

Parameter	Norm	Guideline	Unit
Density	EN ISO 55990	0,91	g/cm ³
Melt Flow index	EN ISO 1133	7,0	g/10 min.
E tensile modulus	EN ISO 527	>1400	MPa
Charpy Impact strength 23 °C	EN ISO 179	90	kJ/m ²
Charpy notched bar impact strength 23 °C	EN ISO 179	4,0	kJ/m ²
Tensile yield strength	EN ISO 527	26	MPa
Elongation at yield	EN ISO 527	> 50	%

All informatin on this product data sheet are average values and are based on our current knowledge and experiences. They do not excuse the user of own examinations and experiments. A legally binding undertaking of certain qualities or the suitability for a specific application can not be derived from this data.

Anwendungen:

- + container for the packagingindustry
- + Housing material for small electrical devices
- + Built-in parts and floors for white goods, especially a. Washing machines, dishwashers or refrigerators
- + Molded parts for household appliances
- + Molded parts used in the interior of motor vehicles, but also bumpers, engine compartments and add-on parts
- + In the construction sector, PP is used for pipes, hot water tanks and garden furniture, among other things
- + In horticulture it is used for drainage and containers



Adresse:

Best Plastic Management GmbH
Industriestraße 20-24
26219 Bösel
Germany

+49 (0) 44 94 / 15 55
+49 (0) 44 94 / 83 27

info@best-plastic.de
www.best-plastic.de

Dokumente:

Verpackung:

Zertifizierung:

